




CAMIE-CAMPBELL, INC.
Aerosol and Bulk Industrial Specialty Chemicals

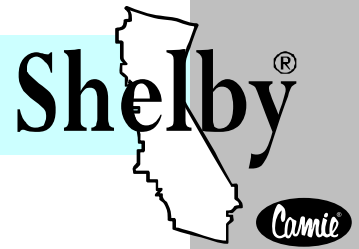

9225 Watson Industrial Park St. Louis, MO 63126-1581
314-968-3222 800-325-9572 fax: 314-968-0741
E-mail: camie@camie.com www.camie.com

SHELBY 210 PRODUCT DATA SHEET

Shelby 210 General Purpose Web Spray Adhesive is transparent and pressure sensitive. It provides instant tack, is repositionable, has a web spray that offers the user low soak in with a high tack bond strength. Due to this product's low soak-in characteristics and high "green strength," it is especially recommended when bonding polyethylene film to drywall, brick and concrete block. It is also excellent for use in partitioning and isolating construction areas.

Applications	This production is recommended for use on wood, polyurethane foam, fabric, paper, dry wall, masonry, plastic, polyethylene and painted surfaces.
Container Size	20 Fluid oz. Container
Product Description	Aerosol Adhesive
Net Weight	12 Ounces
Cans Per Case	12
Case Dimensions-Inches	11 3/16" L X 8 3/8" W X 10" H
Case Weight	13.3 Pounds
Cases Per Pallet	105 Cases
Appearance	White
Odor	Mint When Wet
Solvent System	Hexane & Acetone Blend
Propellant	DME & Hydrocarbon Blend
Bond Time	10 Seconds to 2 Minutes
Heat Resistance	Max. Service Temperature 120° F
Solids	25 % +/- 2%
Spray Pattern	Lace
VOC %	54
VOC Compliant for CA & OTC	Yes
Aerosol Flammability Level	Level 3 Aerosols
Warranty Period	One Year From Date of Shipment
Food packaging Adhesive Complies with 21CFR 175.105	Yes
DOT Proper Shipping Name	Consumer Commodity ORM-D for domestic ground shipment. (See MSDS for additional shipping information)



SHELBY 210

In as much as CAMIE-CAMPBELL, INC. has no control over the use to which others may put the material, it does not guarantee that the same results described herein will be obtained. Each user should make his own tests to determine the material's suitability for his own particular use.